



HBZDV4740/4232/3632

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Unit illustrated is a HBZDV4740N Zero Clearance Direct Vent Natural Gas Fireplace, with LOGC60 Log Set, HB47CVCK Designer Clean View Circulating Kit, and Optional HB47RLH Refractory Liner – Herringbone.



HBZDV4740/4232/3632

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE

Model	HBZDV3632N HBZDV4232N	HBZDV3632LP HBZDV4232LP	HBZDV4740N	HBZDV4740LP
Flue	Top	Top	Top	Top
Fuel	Natural	Natural	Propane	Propane
Input Max.	30,500 BTU	29,000 BTU	40,000 BTU	36,000 BTU
Input Min.	20,600 BTU	22,200 BTU	27,000 BTU	30,000 BTU
FE (P.4.1-02)	60.9%/56.8%	62.4%/56.8%	46.5%	42.5%



STANDARD FEATURES

- Millivolt or IPI valve system allows operation during a power failure with Hi/low heat and flame adjustment
- Dual burner with Realistic Flame Pattern
- A flame sensor that constantly monitors the pilot flame
- Safety Screen Barrier*



Safety Screen Barrier

OPTIONAL FEATURES

Designer Clean View Circulating Kit
No Louvers Required

Grills

Available in Black or Classic Series Black with Polish Brass, Antique or Chrome Accents

Surrounds Wide (Louvered Units)

Polish Brass, Antique, Chrome or Black
Coverage – HBZDV3632 – 35 1/2" h x 41 1/8" w
Coverage – HBZDV4232 – 37 5/8" h x 45 1/8" w
Coverage – HBZDV4740 – 43 5/8" h x 50 1/8" w

Surrounds Slim Line (Louvered Units)

Polish Brass, Antique Brass, Chrome or Gun Metal Black
Coverage – HBZDV3632 – 35 1/4" h x 37 1/2" w
Coverage – HBZDV4232 – 37 3/8" h x 43 3/8" w
Coverage – HBZDV4740 – 43 7/16" h x 48 3/8" w

Fan Kit

Heat activated with variable speed control

Brick Refractory Liner

Traditional, Herringbone, Red Herringbone

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control



* All gas fireplaces manufactured as of January 1, 2015 will include a Safety Screen Barrier.

Model HBZDV4740N, with HB47GBL Black Grill, LOGC60 Log Set, and Optional HB47RLT Traditional Refractory Liner.



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

DESIGNER CLEAN VIEW™ OR LOUVERED FIREPLACES

The ultimate in Zero Clearance Direct Vent Fireplaces for new home construction or renovation, and your best choice for installation anywhere throughout your home.

Kingsman's Direct Vent models are easily adaptable to our patented Designer Clean View technology or standard louvers. Enjoy an incredible line of options and styles— from contemporary to classic – plus the beauty and pleasure of a cozy fire.


OPTIONS




LOGC60 Log Set

Unit illustrated is a HBZDV4740N Zero Clearance Direct Vent Fireplace – Natural Gas, with LOGC60 Log Set, HB47GBL Grill Kit – Black, and Optional HB47RRH Red Herringbone Refractory Liner.

STYLING



Traditional
Brick Liner RLT



Herringbone
Brick Liner RLH



Red Herringbone
Brick Liner RRH

CORNER FRAMING DIMENSIONS

LOUVERED


	HBZDV36	HBZDV42	HBZDV47
A	54 ¹³ / ₁₆ "	58 ¹³ / ₁₆ "	65 ¹ / ₄ "
B	36 ³ / ₈ "	42 ³ / ₈ "	47 ³ / ₈ "
C	36"	42"	47 ¹ / ₁₆ "
D	9 ³ / ₁₆ "	8 ³ / ₄ "	8 ¹⁵ / ₁₆ "
E	38 ³ / ₄ "	41 ⁵ / ₈ "	46 ¹ / ₈ "
F	12 ³ / ₈ "	13 ³ / ₄ "	13 ¹⁵ / ₁₆ "
G	17 ⁹ / ₁₆ "	19 ¹ / ₂ "	19 ¹¹ / ₁₆ "
H	27 ³ / ₈ "	29 ⁷ / ₁₆ "	32 ³ / ₈ "

CLEAN VIEW CIRCULATING KIT (CVCK)

	HBZDV36	HBZDV42	HBZDV47
A	59 ⁷ / ₈ "	63 ¹³ / ₁₆ "	70 ³ / ₁₆ "
B	38 ⁷ / ₁₆ "	42 ⁷ / ₁₆ "	48 ³ / ₈ "
C	38 ¹ / ₁₆ "	42 ¹ / ₁₆ "	48 ¹ / ₁₆ "
D	10 ¹¹ / ₁₆ "	10 ¹ / ₁₆ "	10 ⁷ / ₈ "
E	42 ⁵ / ₁₆ "	45 ¹ / ₈ "	49 ⁵ / ₈ "
F	12 ³ / ₈ "	13 ³ / ₄ "	13 ¹⁵ / ₁₆ "
G	17 ⁹ / ₁₆ "	19 ¹ / ₂ "	19 ¹¹ / ₁₆ "
H	29 ¹⁵ / ₁₆ "	31 ⁷ / ₈ "	35 ¹ / ₈ "

VIEWING AREA	Width	Height
HBZDV36	29 ³ / ₄ "	18 ³ / ₈ "
HBZDV42	33 ³ / ₈ "	20 ³ / ₈ "
HBZDV47	39 ¹ / ₂ "	26 ³ / ₈ "

CORNER FRAMING DIMENSIONS

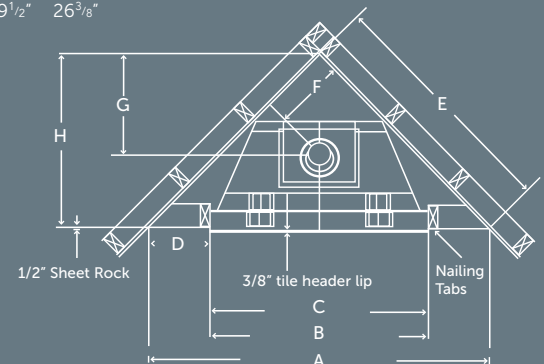

UNIT AND FRAMING SPECIFICATIONS (IN.)

Top Flue Models	Height Actual	Height Framing	Width Actual	Width Framing	Depth Actual	Depth Framing
LOUVERS						
HBZDV36	34 ¹³ / ₁₆ "	35"	36"	36 ³ / ₈ "	16 ⁷ / ₈ "	17"
HBZDV42	37"	37 ¹ / ₈ "	41 ⁷ / ₈ "	42 ³ / ₈ "	16 ⁷ / ₁₆ "	17"
HBZDV47	43 ¹ / ₁₆ "	43 ¹ / ₁₆ "	47 ¹ / ₁₆ "	47 ³ / ₈ "	19 ⁷ / ₁₆ "	19 ¹ / ₂ "
CLEAN VIEW CIRCULATING KIT (CVCK)						
HBZDV36	34 ¹¹ / ₁₆ "	41"	38 ¹ / ₁₆ "	38 ⁷ / ₁₆ "	18 ⁷ / ₈ "	19 ¹ / ₂ "
HBZDV42	36 ¹³ / ₁₆ "	43"	42 ¹ / ₁₆ "	42 ⁷ / ₁₆ "	18 ¹⁵ / ₁₆ "	19 ¹ / ₂ "
HBZDV47	49"	49 ¹ / ₈ "	48 ¹ / ₁₆ "	48 ³ / ₈ "	21 ¹⁵ / ₁₆ "	22"



2340 Logan Avenue
Winnipeg, Manitoba, Canada R2R 2V3
Phone: (204) 632-1962 Fax: (204) 632-1960
www.kingsmanfireplaces.com

HBZDV4740/4232/3632

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation. Certification: The model HBZDV4740 is certified to ANSI Z21.50-2014, CSA 2.22-2014, CGA 2.17-M91 (R2009) Vented Gas Fireplace. The models HBZDV3632/4232 are certified to ANSI Z21.88-2014, CSA 2.33-2014, CGA 2.17-M91 (R2009) Vented Gas Fireplace Heater.