



VFI25 / VFI30

VENTED GAS FIREPLACE INSERT



The Ultimate in Design, Engineering & Quality



This unit illustrated is a VFI30 Vented Fireplace Insert – Natural Gas, with V30S2640B Surround Deluxe – Black V30T2640P Trim Black, V2R2640 Riser for Deluxe Surround VI30GBL Grills – Black and LOGC6 Log Set – Five Piece Cast Split Oak with Glowing Ember Chunks, VI30RL Refractory Brick Liner.

The Ultimate in Vented Fireplace Inserts, convert your wood burning fireplace to gas.

MODEL	VFI25	VFI30
HI/LO FIRE CONTROL	YES	YES
INPUT MAX. (NG)	25,000-17,000 BTU	30,000-17,500 BTU
INPUT MAX. (LP)	25,000-17,000 BTU	30,000-24,000 BTU
EFFICIENCY	74%NG / 78%LP	78%NG / 81%LP
VENTING	4"	4"
FE (P.4.1-02)	45.8%NG / 45.8%LP	50.6%NG / 50.6%LP

INSERT DIMENSIONS

	VFI25	VFI30
A	15 ¹ / ₂ "	15 ¹ / ₂ "
B	14"	14"
C	20 ¹ / ₂ "	20 ¹ / ₂ "
D	14"	14"
E	24 ¹ / ₄ "	26 ¹ / ₂ "
F	26 ¹ / ₄ "	28 ⁵ / ₈ "
G	8 ¹ / ₄ "	8 ¹ / ₄ "
H	16 ³ / ₄ "	20 ¹ / ₄ "
I	19"	22 ⁷ / ₁₆ "

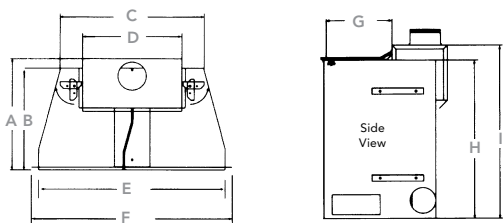

Surround (3 Piece)

3 PIECE SURROUND DIMENSIONS

MODELS	Height (O)	Width (P)	Part #
DELUXE			
VFI25	24 ¹³ / ₁₆ "	36 ³ / ₁₆ "	V25S2436B
VFI30	26 ¹³ / ₁₆ "	40 ³ / ₄ "	V30S2640B
DELUXE LARGE			
VFI25	26 ¹³ / ₁₆ "	40 ³ / ₁₆ "	V25S2640B
VFI30	28 ¹³ / ₁₆ "	44 ³ / ₄ "	V30S2844B

MINIMUM SIZE FOR INSTALLATION

MODELS	Front Width	Rear Width	Height	Depth
VFI25	24"	20 ¹ / ₂ "	17 ¹ / ₂ "	16"
VFI30	29"	20 ¹ / ₂ "	20 ³ / ₄ "	16 ¹ / ₂ "

FEATURES*

- Millivolt valve system allows operation during a power failure with Hi/low heat and flame adjustment
- Blower with a thermostat controlled on/off including variable speed control is standard on all models
- Spill Safety Switch – in case of a blocked flue or downdraft, it will shut down the unit
- Dual burner system with glowing embers
- Bedroom and Bed Sitting Room approved

OPTIONAL FEATURES*

Log Sets – Choose from our LOGC6 five piece cast split oak log set with glowing ember chunks, or LOGC5 four piece cast split oak

Grills – Grills available in Black, or Classic Series Black with Polish Brass, Antique or Chrome Accents

Surrounds Deluxe (3 piece) – Black with Black trim

Risers for Deluxe Surrounds – Increases height coverage by 2¹/₂"

Thermostat – Wall Mount Millivolt, Thermostat, or Programmable Thermostat

Remote Control – On/Off, Thermostat or Hi/Lo On/Off

Refractory Brick Liner – VFI30 only



CHOICE OF LOG SETS

LOGC5 Split Cast Log Set

This unit illustrated is a VFI30 Vented Fireplace Insert – Natural Gas, with V30S2640B Surround Deluxe – Black V30T2640B Trim Black, V2R2640 Riser for Deluxe Surround V130GBL Grills – Black and LOGC5 Split Cast Log Set, V130RL Refractory Brick Liner.



Kingsman Industries maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation. Certification: The models VFI25 and VFI30 are certified for Canada and USA. Listed Vented Gas Fired Room Heater to CAN1-21-M86, CAN/CGA 2.17-M91, ANSI Z21.11.1a-1993, CR89-001, CGAP.4-1-1996, ANSI Z21.50-1996/CGA 2.22-M96.

*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.



2340 Logan Avenue
Winnipeg, Manitoba, Canada R2R 2V3
Phone: (204) 632-1962 Fax: (204) 632-1960
www.kingsmanfireplaces.com